

8825 VACUUM VALVE


8825 VACUUM VALVE is a two-piece vacuum valve assembly.

This valve is similar to the industry standard two-piece vacuum valve with an additional feature of a self-positioning threaded locking pin. This feature allows the locking pin to be tightened in any position on the locking ramp of the valve base. This eliminates any galling of the base and extends the life of the valve.

It also assures maximum sealing of the bagging material.

The valve has a high rise knurled locking ring which keeps the operator's hands and fingers away from the bagging material, reducing the chance of damage to the bagging material.

8825 VACUUM VALVE is ideal for any bagging use up to 500°F (260°C) with any bagging material and resin system.

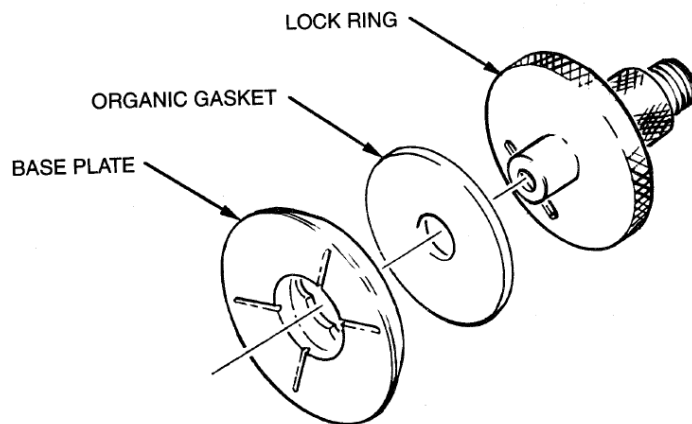

PHYSICAL PROPERTIES

<u>Connector:</u>	1/4" I.D. with 1/4" NPT standard
<u>Alloy:</u>	Aluminum or steel
<u>Gasket:</u>	Silicone rubber